Paslode Impulse IM65A F16 Angled Gas Brad Nailer

A distinctive angled brad nailer designed specifically for working in tight spaces and corners. Benefits are a small, light shell, nail lockout, excellent depth of drive adjuster and easy jam clearance.



Eurocode & Description

Eurocode: 013311Box Qty
IM65A F16 Angled Brad Nailer 1

Technical Specification

Weight: 2.3kg

Dimensions: 292 x 267 x 90mm

Power: 30J

Brad range: 32mm - 63mm

Cycle rate: 2 - 3 brads / second

Maximum 1,000 brads / hour

cycle rate: 4,000 brads / day

Magazine: 100 brads
Fuel cell life: Approx. 1,000
Battery NiCd: Approx. 4,000
(1.2 Ah 6V) fixings per charge
Charger 230V: 2 hours max. charge

Substrates

- Softwood and Hardwood
- MDF and similar substrates
- Laminates



key and instruction manual.

Features and Advantages

- Lightweight Helps reduce operator fatigue
- Powerful Drives 32 63mm
- Sequential operation 2 3 brads per second for limited periods
- Compact design Allows for easy access
- Quick clear nose cover Quick easy access in the unlikely event of a jam
- No-mar contact with sight lines
 For accurate placement and reduced damage to wood
- Tool free depth of drive adjustment - Provides precise control of brad depth
- Mini fuel cell Drives up to 1,000 brads per cell
- Nail Lockout Preventing blank firing and minimises wood damage
- Rear load magazine Easy brad loading, holding 2 strips of brads (100 brads)
- Reversible belt hook Easy access when not in use



Tool free depth of drive adjustment



No-Mar contact



Fastener lockout



Reversible belt hook




Battery socket



IM65 Fuel Cell (Mini)

Special Mini Impulse gas fuel cells are included in Brad Fuel packs.



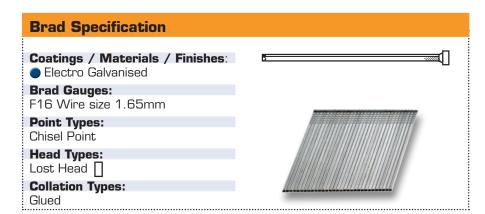

Brad Fuel Packs

F16 Angled Brad Fuel Packs for IM65A F16 and IM250A



Eurocode	Gauge	Length	Finish	Fuel Cells	Box Qty
300270	F16	32mm	ELGV	2	2,000
300271	F16	38mm	ELGV	2	2,000
300272	F16	45mm	ELGV	2	2,000
300273	F16	51mm	ELGV	2	2,000
300274	F16	63mm	ELGV	2	2,000

Brad Selection Guide						
APPLICATIONS	Dado rail	Architrave	Skirting	Beading	Door stop	MDF fixing
F16 x 32mm	•					
F16 x 38mm						
F16 x 45mm						
F16 x 51mm						
F16 x 63mm						
● ELGV - ELECTRO GALVANISED Light duty protection - 1- 3 microns galvanising						

ALSO AVAILABLE





Paslode Impulse 2nd Fix Kit

Eurocode: 922676 Box Qty

NAKED IM65 F16 Brad Nailer + NAKED IM65A F16 Brad Nailer (Includes Tools ONLY)



Applications

- Door stops
- Tongue and Skirting boards groove panelling
- Architraves
- Window casing
- Dado rail
- Beading
- Stair rails
- MDF fixing

Noise / Vibration Information

Noise Emissions: Measured values determined according to EN 12549.

LwA, 1s dB (A) 114 LpA, 1s dB (A) 101 LpCpeak dB 132 Measured according to EN ISO 8662-11

HAV: The typical weighted acceleration does not exceed 2.6m/s2

Accessories: Refer to Page 57 for full list

Eurocode	Description	Qty
219236	219236 Contact Elements for IM65A	
404717	Impulse Battery Cell	1
035460	Charger Base	1
900506	AC / DC Adaptor	1
900200	Battery Charger with AC / DC Adaptor	1
900507	In-car Charger Adaptor	1
014121	Safety Goggles	1
013060	Impulse Cleaning Kit	1
401482	Impulse Lubricating Oil	1
115251	Impulse / Pulsa Cleaner	1
300341	Paslode Impulse Mini Fuel Cell Blister Pack Yellow	1 2
921637	Paslode Spit 2 Pocket Tool Belt	1

